

A photograph of a white marble fireplace with a black glass front. Inside the fireplace, a fire is burning over logs. The fireplace is set against a red wall. On the mantel, there is a framed picture, a small plant, and a decorative bowl. A larger potted plant is on the floor to the left. The floor is made of wood with a patterned rug.

heatilator[®]
The first name in fireplaces

Reveal

b-vent gas fireplace

Reveal b-vent gas fireplace

Proven Value and Dependability

Recreate the timelessness of a wood-burning fire with the open-hearth Reveal. Full, generous flames rise through a detailed log set, while a 3-layered burner adds intensity and depth. A clean face finish and textured brick interiors provide traditional masonry style. Make it your own and anchor your space with distinct finishing options.

- 36" or 42" viewing area
- Unique, 3-level burner
- Up to 40,000 BTUs; 36" model
- Open-hearth design with optional glass doors
- Traditional or herringbone brick interiors
- Up to 43,000 BTUs; 42" model

IntelliFire™ Ignition System

The IntelliFire™ Ignition System (IPI) is an advanced intermittent pilot ignition system. IPI constantly monitors ignition, ensures safe functioning and conserves up to \$10/month in energy costs. To learn more, scan the code with your smartphone, or visit heatilator.com.



Above: Reveal shown with Bridgeport mantel, marron brown marble and bi-fold doors
Cover: Reveal shown with custom mantel and bi-fold doors

Options



Glass door - non-operable



Glass door - operable


Additional Options Not Pictured

- Remote Controls & Wall Switches
- Thermal Damper
- LP Gas Conversion Kit
- Mantels and Surrounds

Venting


- B-Vent: 6" B-vent pipe

Dimensions

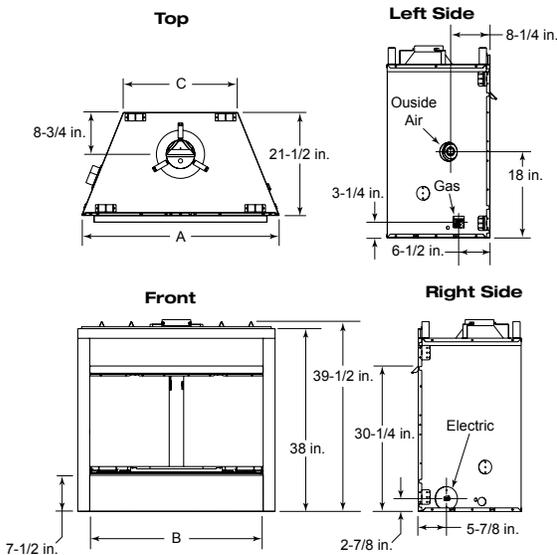


MODEL	A	B	C
RBV4236I	41 in.	36 in.	23-3/4 in.
RBV4842I	47 in.	42 in.	29-3/4 in.

Dimensions

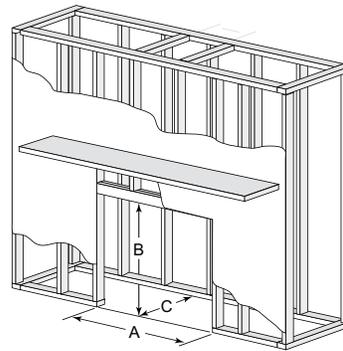

MODEL	A ROUGH OPENING (WIDTH)	B ROUGH OPENING (HEIGHT)	C ROUGH OPENING (DEPTH)
RBV4236I	42 in.	39-3/4 in.	22 in.
RBV4842I	48 in.	39-3/4 in.	22 in.

Clearances

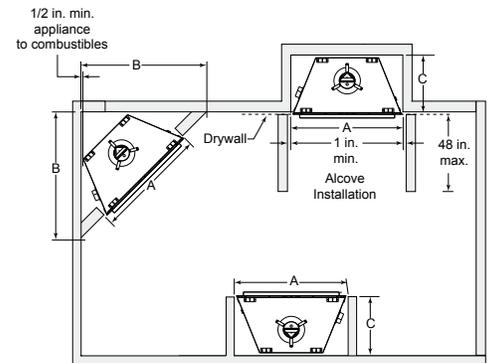

MODEL	A	B	C
RBV4236I	42 in.	48 in.	22 in.
RBV4842I	48 in.	51-1/4 in.	22 in.

The rough framing dimensions shown represent the distance from stud to stud only and do not take into consideration the addition of drywall. Please refer to installation instructions for complete specifications and drawings when installing this product. Go to www.heatilator.com to download.

Available From



PHONE: 800-927-6841
 WEB: heatilator.com

- [facebook.com/Heatilator](https://www.facebook.com/Heatilator)
- twitter.com/Heatilator
- [youtube.com/HeatilatorFireplaces](https://www.youtube.com/HeatilatorFireplaces)

Limited Lifetime Warranty*

The strongest in the industry, Heatilator provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

*For full warranty details go to heatilator.com.

The information provided in this literature is for planning purposes only and subject to change. Please consult the installation manual for actual installation. Actual product appearance may differ from product images.

Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit: www.heatilator.com/fireplacesafety.

